


Use, Care and Maintenance

Fusion PLUS Shutters

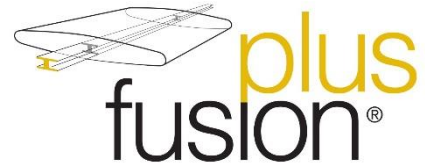

Fusion PLUS Shutters are unsurpassed for quality in appearance and structure and are manufactured to last. Like all home furnishings however, they need proper care and regular maintenance in order to prolong their life.

Operating Fusion PLUS Shutters:

- Before opening hinged panels or operating sliders or bifolds, ensure blades are closed to prevent damage.
- When sliding bypass panels, ensure blades are closed to prevent blades from clashing.
- When opening bifolds, start in the centre or the end of the stack, and stack the panels together as you go.
- Glides and magnetic catches are installed to help compensate for movement of panels within the frame.
- Panels will naturally flex when opening and closing and should be assisted by slightly lifting the panel against the magnetic stop.
- Do not force or slam shutters closed as this will cause damage to both the shutter and the frame work.
- Never swing or place any weight on the shutter.
- Do not put your hands through the blades to gain access to window openings as this will place strain on the blades that will not be covered under warranty.
- When adjusting blades by hand, move two blades simultaneously and stop if you feel any resistance.
- Never tilt one blade on its own as you may cause damage to the clearview mechanism or blade.

Maintaining Fusion PLUS Shutters:

- Rotate blades daily
- Keep any tracks free of dirt and grit weekly. Use a silicone spray lubricant if necessary
- Regularly clean blades with a soft slightly damp cloth to remove dust
- Fusion PLUS shutters may be cleaned with a mild diluted dishwashing liquid and a soft cloth, or a mild base household cleaner for more difficult dirt and stains
- External shutters should be hosed down regularly and washed with a mild soap solution to remove air pollutants and salt residue in coastal areas
- Always rinse afterwards with fresh water so that the contact time of the cleaning solution is kept to a minimum
- NEVER USE hot water, alcohol, silicon-based sprays, solvents, chlorine-based cleaners, steel wool, scourers or abrasive cleaners on shutters as they may affect the surface appearance and durability
- Do not use undue weight or pressure on the blades whilst wiping
- If any blades come loose, use the tension screw to tighten again (located at the side of the shutter panel)
- Please contact your Sunline Shutters dealer if you have any questions or concerns about your Sunline Shutters.

NOTE:

Details contained herein are provided as a matter of general information and does not constitute as specific advice. You should seek your retailer's advice to ensure that any information or suggestion meets your specific requirements.